

twilight

INSTRUMENTOS DE MEDICIÓN INDUSTRIAL

Batería Litio 3.0V para Gas Alert Micro 5 BW-E2829

www.twilight.mx

 / [twilightsadecv](https://www.facebook.com/twilightsadecv)

 / [twilightsadecv](https://twitter.com/twilightsadecv)

 / [twilightsadecv](https://www.youtube.com/twilightsadecv)

CODIGO 10-CR2
Nombre BATERIA LITHIUM 3 VOLTS REEMPL
Nombre Familia FOTOGRAFIA
Nombre SubFamilia ION LITIO
Nombre Marca Panasonic
Imagen



Adicionales

CR2 LITHIUM MANGANESE DIOXIDE

Panasonic




Features & Benefits

- Operating temperature range between -40°C to $+70^{\circ}\text{C}$
- High current pulse discharge capability
- Stable voltage level during discharge
- High safety and reliability


Specifications

Nominal Capacity: 850 mAh
Nominal Voltage: 3V
Weight: Approximately 11g
Operating Temperature: -40°C - $+70^{\circ}\text{C}^*$
 *Please consult Panasonic for use below and above -20°C to $+60^{\circ}\text{C}$

Dimensions




Temperature Characteristics

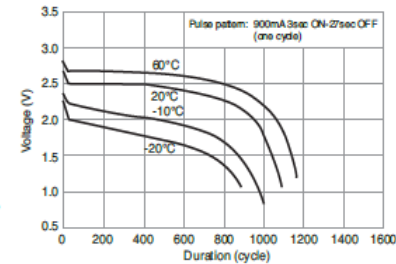


*Please consult Panasonic for use below and above -20°C to $+60^{\circ}\text{C}$


Continuous Discharge Characteristics (60°C)

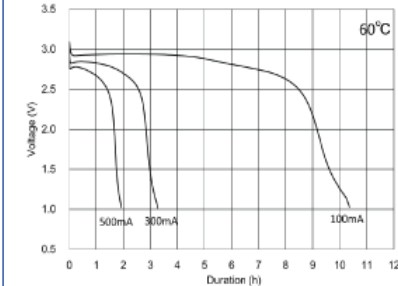

Continuous Discharge Characteristics (20°C)

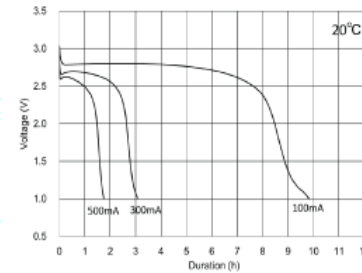

Continuous Discharge Characteristics (-20°C)

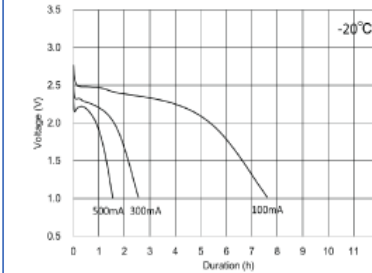

For more information on how Panasonic can assist you with your battery power solution needs call 877-726-2228, visit www.na.industrial.panasonic.com/products/batteries or e-mail oembatteries@us.panasonic.com.

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

twilight

INSTRUMENTOS DE MEDICIÓN INDUSTRIAL



LLÁMANOS

+52(81) 8115-1400 / +52 (81) 8173-4300

LADA Sin Costo:
01 800 087 43 75

E-mail:
ventas@twilight.mx

www.twilight.mx