

twilight

INSTRUMENTOS DE MEDICIÓN INDUSTRIAL

Termohigrómetro De Panel

HT-HE230ATH

www.twilight.mx



/ twilightSadecv



/ twilightSadecv



/ twilightSadecv

HE2XX LED Temperature Humidity Display Board



HE212A

Visual distance 10m



HE230T

- Visual distance 20m
- External temperature probe



HE218A-TH-USB

(Visual distance 20m)



HE218A-WIFI

(WIFI communication port)




HE218A-EX-RJ45

- Visual distance 20m
- External sensor with 3 meters cable




HE218A-EX-RS485

- Visual distance 20m
- External sensor with 3 meters cable



HE230A-TH

(Visual distance 40m)

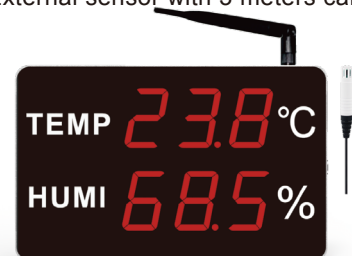

HE230A-WIFI

(WIFI communication port)



HE230A-EX-RJ45

- Visual distance 40m
- External sensor with 3 meters cable




HE230A-EX-RS485

- Visual distance 40m
- External sensor with 3 meters cable


HE2XX LED Temperature Humidity Display Board



HE250A-TH-USB
(Visual distance 75m)

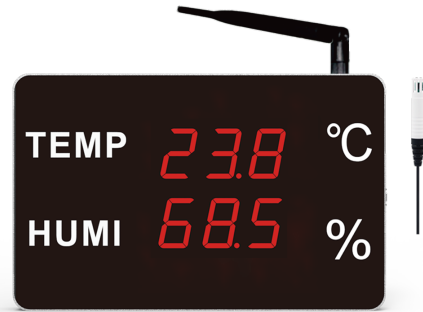


HE250A-WIFI
(WIFI communication port)

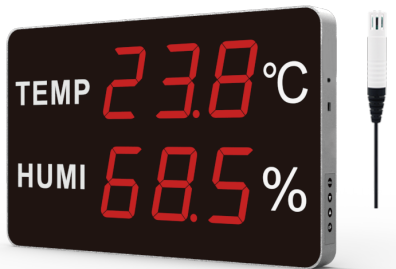

HE250A-EX-RJ45

- Visual distance 75m
- External sensor with 3 meters cable

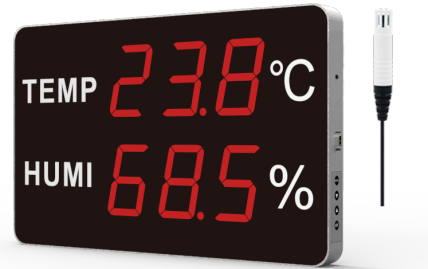

HE250A-EX-RS485

- Visual distance 75m
- External sensor with 3 meters cable



HE218B-TH-USB
(USB communication port)



HE218B-WIFI
(WIFI communication port)



HE218B-EX-RJ45

- Visual distance 75m
- External sensor with 3 meters cable



HE218B-EX-RS485




- Visual distance 75m
- External sensor with 3 meters cable

HE2XX LED Temperature Humidity Display Board






Large Screen Temperature & Humidity Billboards

Model	HE212A	HE218A-TH	HE230T	HE230A-TH	HE250A-TH	HE218B-TH
		HE218A-EX		HE230A-EX	HE250A-EX	HE218B-EX
Log	/	/	/	HE230C-TH	HE250C-TH	HE218C-TH
				HE230C-EX	HE250C-EX	HE218C-EX

Large Screen Temperature & Humidity Billboards With Online Monitor Function

Model with Ethernet port 	/	/	/	HE230C-TH-RJ45	/	HE218B-TH-RJ45
				HE230C-EX-RJ45		HE218B-EX-RJ45
Model with RS485 port 				HE230C-TH-RS485	HE250A-RS485	HE218B-TH-RS485
				HE230C-EX-RS485		HE218B-EX-RS485
Model with wireless	/	/	/	HE230W	/	HE218B-W
LED size (inch)	1.2"	1.8"	3"	3"	5"	1.8"
Visual range	10M	20M	40M	40M	75M	20M
Temperature accuracy	±0.3°C (0°C~50°C) 、 ±0.5°C (other range)					
Humidity accuracy	±3%RH (25°C、20%RH~80%RH) 、 ±5%RH (other range)					
Sensor type	External sensor with 1.5/3 meters cable					
Temperature measurement range	-40~85°C		-200~200°C	-40~85°C		
Humidity measurement range	0~100%RH		/	0~100%RH		
Net weight (KG)	0.7	2.3	1.87	2.3	5.38	5.38
Standard accessories	User manual , sensor , warranty card, quality certificate					
Optional features	① External sound & light alarm ② GSM alarm ③RS485 communication ④ TCP/IP communication ⑤ WiFi communication ⑥ Data record					 External sound & light alarm
Product dimension(CM)	38.26x24.26x4.54	38.26×24.26×4.545	/	/	/	/
Packaging dimension (CM)	46x31.5x8.5	46x31.5x8.5	/	/	/	/
Features	1、 Appearance: wall mounted , with external sensor. 2、 Resolution:temperature 0.1°C, humidity 0.1%RH. 3、 Key:4 keys, could set deviation, upper and lower limits for alarm, turn on/off the external sound & light alarm. 4、 In addition to HE212A, other models can be equipped with external sound and light alarm function. 5、 Display resolution 0.1.					
Remark	1.TH :Intenal sensor 2.EX: External sensor with 3meters cable					

HE2XX LED Temperature Humidity Display Board

Model	HE212A	HE218A	HE230A	HE250A
	HE212A visual distance of 15m 	HE218A visual distance of 20m 	HE230A visual distance of 40m 	HE250A visual distance of 75m 

LED height range from 1.8 to 5 inches, the screen is customizable, display content can be temperature, humidity, pressure, CO2, atmospheric pressure, etc. It adopts bright LED digital display, words are sharp and clear, visual distance up to 100m, the changes of temperature and humidity can be seen clearly by every staff, user can notice immediately if there's something abnormal. It's ideal for the monitoring of environmental factors in workshop, warehouse, achieve room, cold storage room, clean room, office and communication machine room.

Features

- Long visual distance from 15~75m.
- Switzerland imported sensor with high accuracy & stability.
- Year, month, day, temperature simultaneously display.
- Communication interface optional: USB/RJ45/RS485/WIFI.
- Deviation can be calibrated by buttons.
- Memory for 43000 readings.
- Optional function: To monitor software with remote online certified monitor by PC/APP.

Applications


Widely used in the museum, police interrogation room, home, office, hotel, restaurant, school, meeting room, factory, shopping mall, warehouse, waiting room, hospital, greenhouse, nursery, animal husbandry and other indoor environments.



Standalone version software

LogPro Recorder Analysis Software

LogPro software is Huato temperature and humidity recorder dedicated data analysis software, beautiful interface, elegant, easy to use and efficient, the software is very comprehensive, can logger attribute settings, download logger data, graphically analyze data, export the data to Excel / PDF / BMP and other formats.

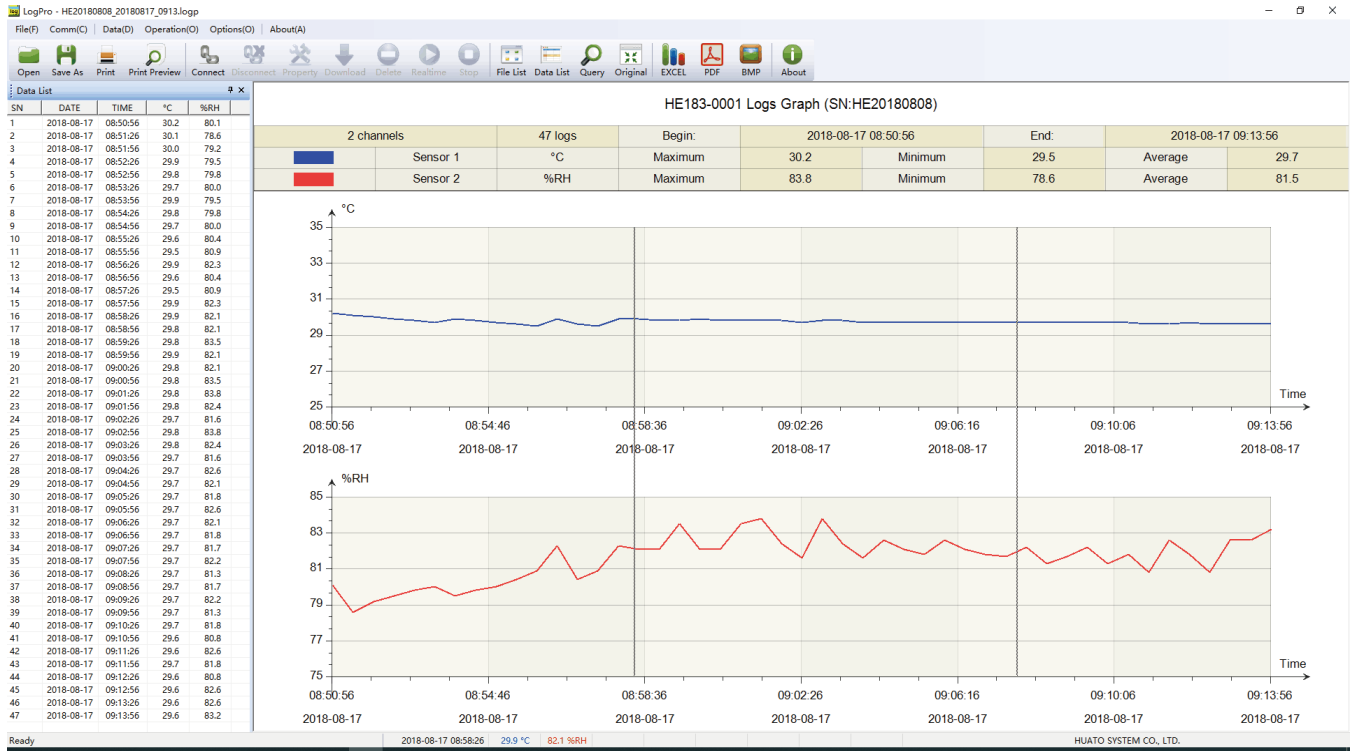


HE250A

Logger Info:

LOGGER_SN:	HE20180808		
Begin Time:	2018-08-17 08:50:56	End Time:	2018-08-17 09:13:56
Number of Points:	47		
Min:	29.5 (° C) / 78.6 (%RH)		
Max:	30.2 (° C) / 83.8 (%RH)		
Mean:	29.7 (° C) / 81.5 (%RH)		

SN	Time	° C	%RH
1	2018-08-17 08:50:56	30.2	80.1
2	2018-08-17 08:51:26	30.1	78.6
3	2018-08-17 08:51:56	30.0	79.2
4	2018-08-17 08:52:26	29.9	79.5
5	2018-08-17 08:52:56	29.8	79.8
6	2018-08-17 08:53:26	29.7	80.0
7	2018-08-17 08:53:56	29.9	79.5
8	2018-08-17 08:54:26	29.8	79.8
9	2018-08-17 08:54:56	29.7	80.0
10	2018-08-17 08:55:26	29.6	80.4
11	2018-08-17 08:55:56	29.5	80.9
12	2018-08-17 08:56:26	29.9	82.3
13	2018-08-17 08:56:56	29.6	80.4
14	2018-08-17 08:57:26	29.5	80.9
15	2018-08-17 08:57:56	29.9	82.3

Logpro stand-alone software

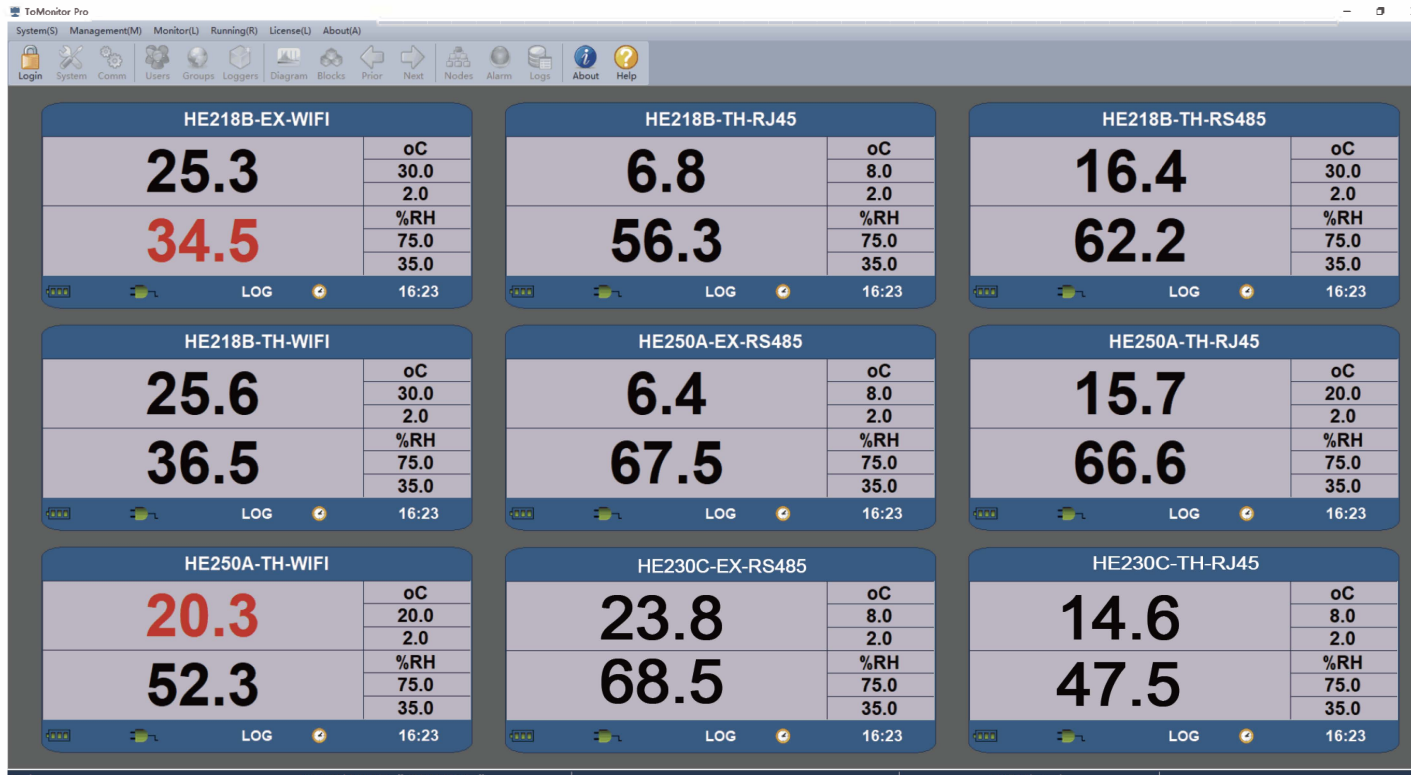

twilight

INSTRUMENTOS DE MEDICIÓN INDUSTRIAL



LLÁMANOS

+52(81) 8115-1400 / +52 (81) 8173-4300

LADA Sin Costo:
01 800 087 43 75

E-mail:
ventas@twilight.mx

www.twilight.mx